DESIGN OF EMERGENCY SPILLWAY

Exhibit 11-8 has been prepared from a large number of reservoir routings to show the effect of storage above the principal spillway elevation and the ratio of DA/PA (drainage area divided by pool area) on reduction of peak outflow. These curves can be used to modify outflow for the emergency spillway design for ponds which would cause little hazard if failure occurred.

For example:

Given: watershed = 100 acres

25-year peak inflow = 190 cfs

crest of emergency spillway (ES) is 1.5 feet above principal spillway (PS)

pond area at PS elevation = 2 acres

PS has design capacity of 45 cfs with water surface at ES crest

Determine: dimensions of emergency spillway

peak inflow minus principal spillway design capacity

190 - 45 = 145 cfs

 $DA/PA = \frac{100}{2} = 50$

from A, exhibit 11-8, and $H_p = 1.7$ feet percent of peak = 67.5, and from B, percent of peak = 54.5

For 1.5 feet between PS and ES, percent of peak discharge, by interpolation, is $\frac{67.5 + 54.5}{2} = 61$.

Required ES capacity = $145 \times 0.61 = 88$ cfs

A vegetated spillway with 3:1 side slopes and

 $H_p = 1.7$ feet, and

b = 14 feet, will discharge

Q = 90 cfs, with


V = 5.3 fps, when

S = 2.5 percent (slope of exit section)

Spillway is satisfactory.


EMERG. SPILLWAY DISCHARGE IN PERCENT OF THE 25-YEAR PEAK INFLOW



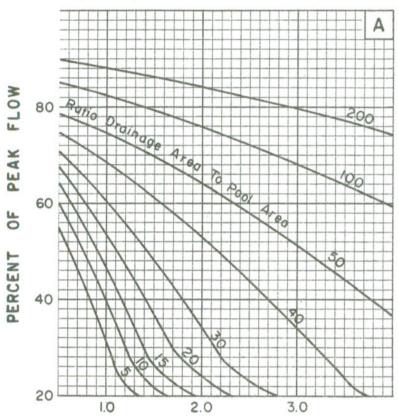

DEPTH OF FLOW THROUGH EMERGENCY SPILLWAY (Hp)-ft.

TWO FEET BETWEEN PRINCIPAL & EMERGENCY SPILLWAYS

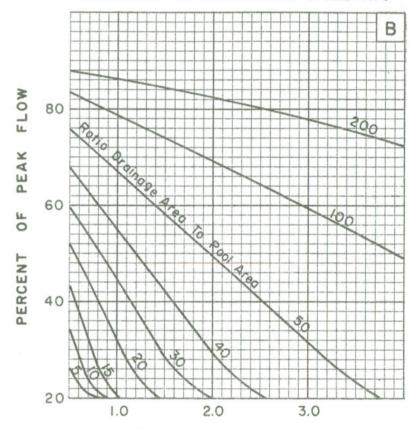

DEPTH OF FLOW THROUGH EMERGENCY SPILLWAY (Hp)-ft.

Exhibit 11-8

REFERENCE

U. S. DEPARTMENT OF AGRICULTURE SOIL CONSERVATION SERVICE ENGINEERING & WATERSHED PLANNING UNIT

RTSC - NE - ENG.


1120


SHEET .

OF ___

11-6


EMERG. SPILLWAY DISCHARGE IN PERCENT OF THE 50-YEAR PEAK INFLOW



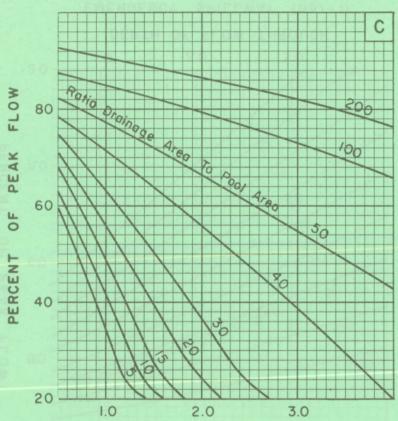

DEPTH OF FLOW THROUGH
EMERGENCY SPILLWAY (Hp)-ft.

TWO FEET BETWEEN
PRINCIPAL & EMERGENCY SPILLWAYS

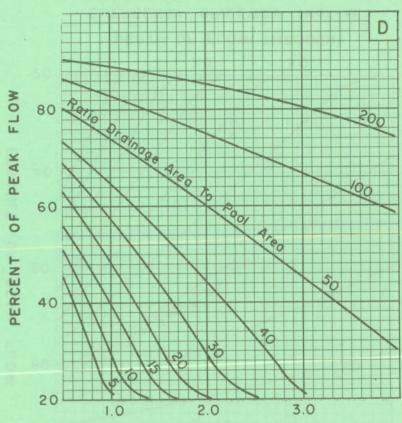

DEPTH OF FLOW THROUGH
EMERGENCY SPILLWAY (Hp)-ft.

Exhibit 11-8

REFERENCE

U. S. DEPARTMENT OF AGRICULTURE SOIL CONSERVATION SERVICE ENGINEERING & WATERSHED PLANNING UNIT UPPER DARBY, PENNSYLVANIA

RTSC - NE - ENG.


1 1 2 0

SHEET ___ 0F __ 3

11-63


EMERG. SPILLWAY DISCHARGE IN PERCENT OF THE 100-YEAR PEAK INFLOW



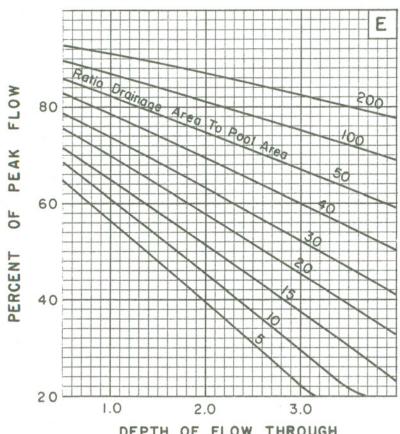

DEPTH OF FLOW THROUGH EMERGENCY SPILLWAY (Hp)-ft.

TWO FEET BETWEEN PRINCIPAL & EMERGENCY SPILLWAYS

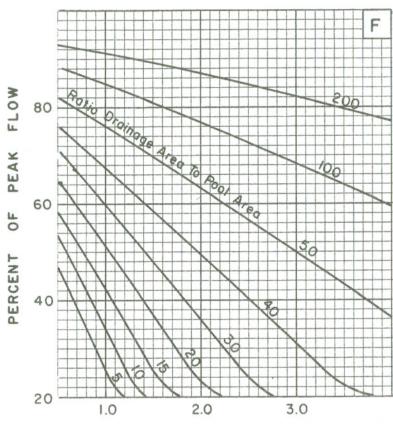

DEPTH OF FLOW THROUGH EMERGENCY SPILLWAY (Hp)-ft.

Exhibit 11-8

REFERENCE

U. S. DEPARTMENT OF AGRICULTURE SOIL CONSERVATION SERVICE

RTSC - NE - ENG.